



The Fork Rhino™ Receiver Pinned

SAVE TIME AND MONEY...


Use your forklift to move equipment with one simple-to-install tool!

Have you been moving equipment with one fork?
This method often results in fork sag and uncontrolled fork swing often causing damage to the forklift and/or the equipment being moved. The Fork Rhino evenly spreads the load to both forks.



- **2" Receiver accepts Class III and IV inserts**
- **6" wide fork pockets (NEW!)**
- **New handle placement allows for tighter turning radius (NEW!)**

Turn your forklift into the **TOUGHEST**, most **VERSATILE** moving machine in your warehouse!

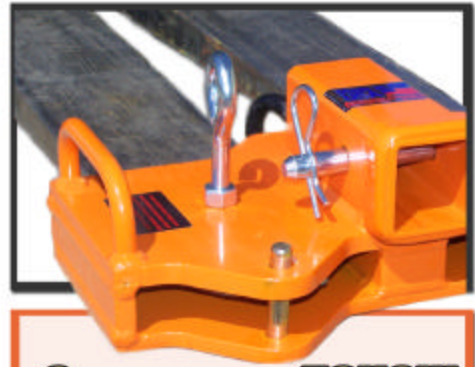

COMPACT AND TOUGH!

1/3 size and weight of conventional trailer spotters!

ForkRhino.com

We have a long list of satisfied customers.
For more information, please call 814-474-5561.



**Automation
Devices, Inc.**

7050 WEST RIDGE ROAD ● FAIRVIEW, PA 16415
PHONE 1-814-474-5561 ● FAX: 1-814-474-2131
WWW.FORKRHINO.COM ● SALES@AUTODEV.COM

Distributed By:



The Fork Rhino™ Receiver Pinned Installation



Maximum Capacity

The load capacity of the Fork Rhino is limited to the interchangeable ball and insert rating. **INDIVIDUAL FORK TRUCK TIPPING WEIGHT MAY DIFFER FROM THE LOAD CAPACITY OF THE FORK RHINO.**

Installation


Maximum Fork Width : 6"

1. Position forks so they are 2" apart.
2. Slide Fork Rhino onto forks until fork tips are secure against limiting pins.
3. Mark holding pin hole centers on forks and remove Fork Rhino.
4. Drill a 17/32 inch perpendicular hole through forks at holding pin marks.
5. Slide Fork Rhino onto forks and align holding pin holes.
6. Drop holding pins through BOTH holes on top of Fork Rhino. (as shown in photo)
7. Hook trailer safety chains to Fork Rhino carrying handles while maneuvering.



PRECAUTIONS

- Not intended for high speed or highway use.
- Consult your fork truck manual or manufacturer for maximum tipping weight.
- Do not lift equipment beyond point at which a positive tongue weight is maintained.

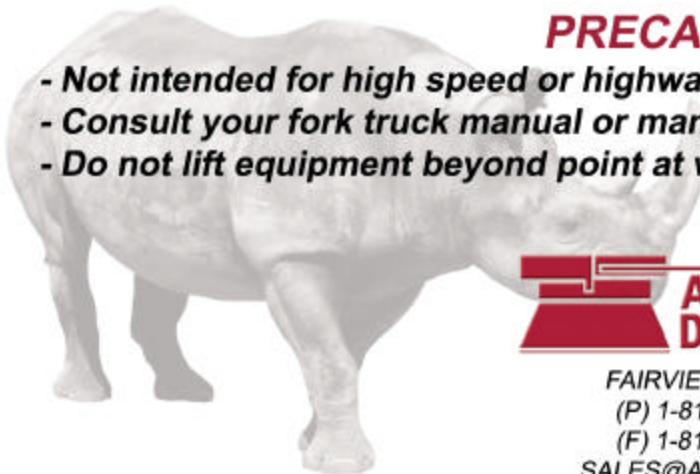

**Automation
Devices, Inc.**

FAIRVIEW, PA 16415

(P) 1-814-474-5561

(F) 1-814-474-2131

SALES@AUTODEV.COM

WWW.AUTODEV.COM



Made in the
USA